



REQUIREMENTS:

1:100% short,open and miss wire test.

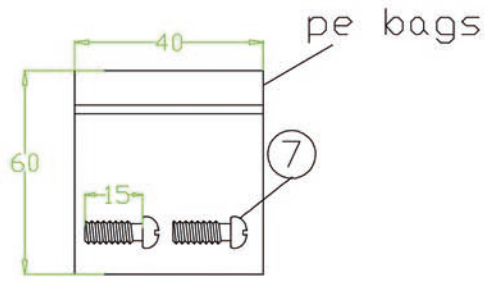

⑦	THUMB SCREW	#4-40*15	2	PCS
⑥	THUMB SCREW	NUT-NICKEL PLATED#4-40	2	PCS
⑤	OUTER MOLDED	BLACK 45P PVC	0.032	KG
④	INTER MOLDED	LDPE	0.008	KG
③	CONNECTOR	USB A TYPE FEMALE ,THE PIN GOLD PLATED, THE SHELL FOR NICKEL PLATED,WHITE INSULATOR	1	PCS
②	CONNECTOR	USB B TYPE FEMALE ,THE PIN GOLD PLATED, THE SHELL FOR NICKEL PLATED,WHITE INSULATOR	1	PCS
①	CABLE	UL2725 [28AWG*1P+24AWG*2C+AL-FOIL+BRAID64/0.1CCS]BLACK PVC JACKET,OD;ø4.8±0.2MM	0.3	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date APRIL 23.2013	File name USB AF/BF L=0.2M	Date APRIL 23.2013	Scale FREE
LYNDAHL®			LKPK007		
			LKPK007	Edition 1	Sheet 1/1