



RoHS compliant

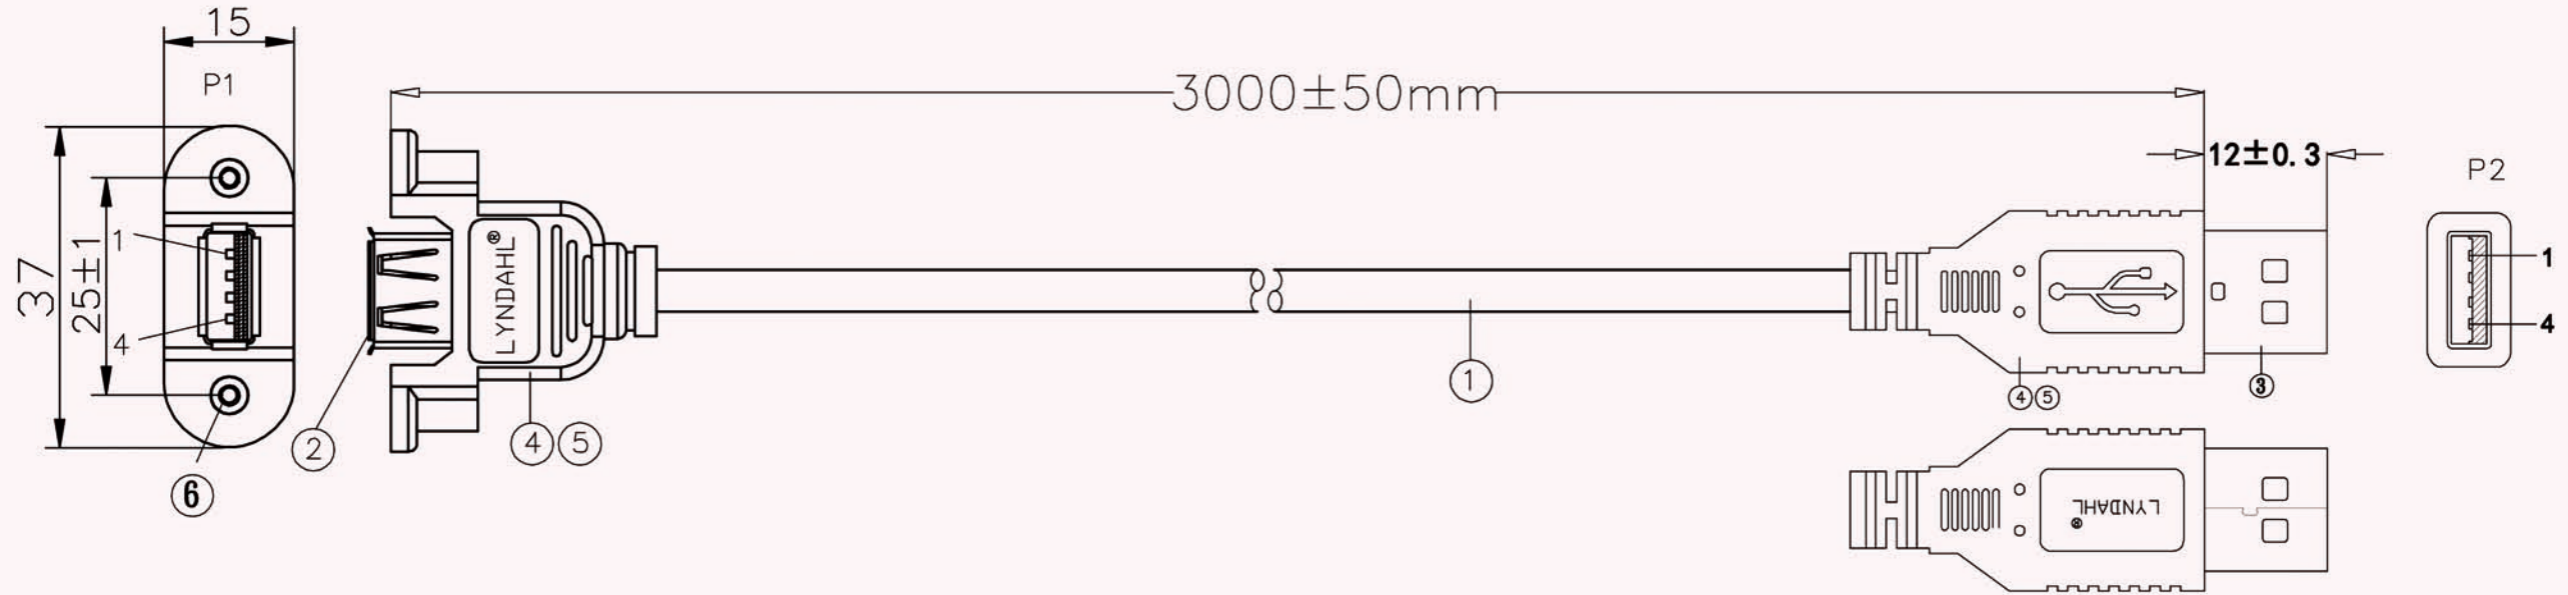

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 150V 0.01S
- C.INSULATION RESISTANCE:DC200V 0.01S 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:2 OHM (MAX)

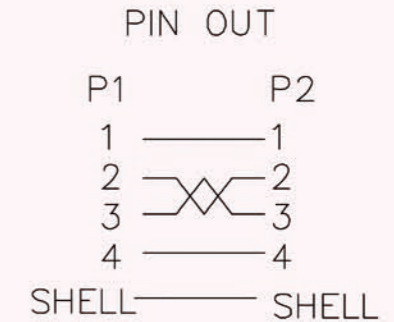

⑦	THUMB SCREW	#4-40 screws	2	PCS
⑥	THUMB SCREW	#4-40 Φ 4.5*L10	2	PCS
⑤	MOLDED	45P BLACK PVC	13	G
④	MOLDED	LDPE	3	G
③	CONNECTOR	P2:USB A Male: White Insulation PIN G/F NI plated	1	PCS
②	CONNECTOR	P1:USB A Female:White Insulation PIN G/F NI plated	1	PCS
①	CABLE	UL2725 (7/0.12BC)*1P+(7/0.20BC)*2C+AL-FOIL+D(7/0.12BC)+BRAID(64/0.1CCS)BLACK PVC JACKET,OD; ϕ 4.8±0.2MM	L	MM
NO	NAME	SPECIFICATIONS	Q'TY	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY	Checked by NIKE	Approved by - date Nov 17TH 2014	File name usb	Date Nov 17TH 2014	Scale FREE
ANGLE:	LYNDAHL®		USB AM /F Panel Mount		
UNIT:MM	© Traderia GmbH		LKPK015-30	Edition 1	Sheet 1/1