


REQUIREMENTS:

1:100% short,open and miss wire test.

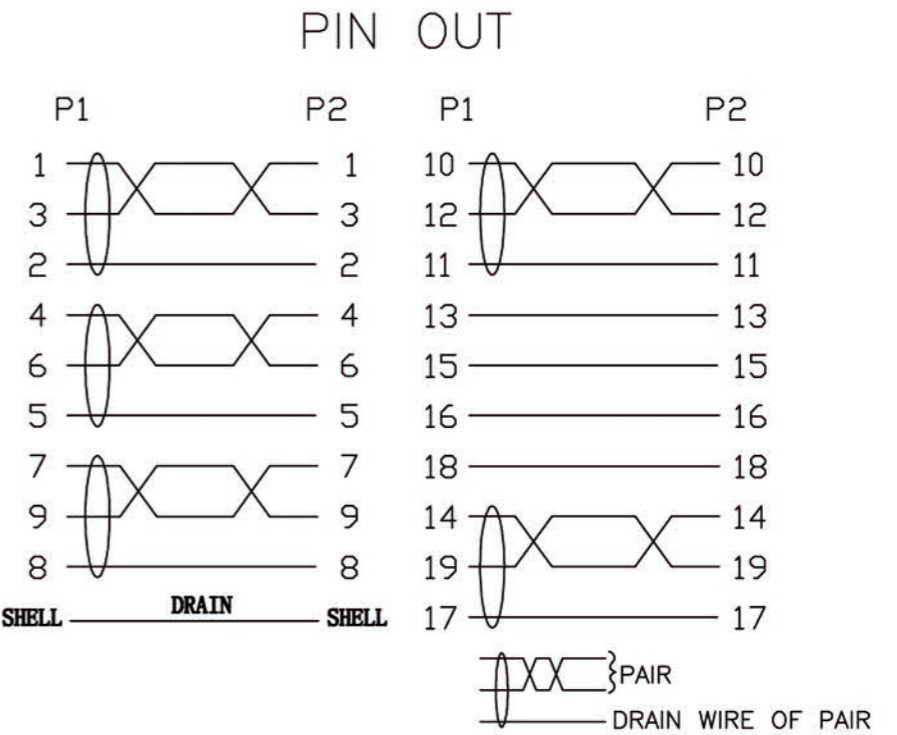

⑧	THUMB SCREW	#4-40*14 (PLUM 0# FLUSH COUNTERSUNK HEAD SCREWS D=5.5, 8.8 BLACK)	2	PCS
⑦	THUMB SCREW	NUT-NICKEL PLATED#4-40	2	PCS
⑥	BOOT	HDMI A MALE LDPE BOOT	1	PCS
⑤	OUTER MOLDED	BLACK 45P PVC	0.032	KG
④	INTER MOLDED	LDPE	0.008	KG
③	CONNECTOR	HDMI 19PIN MALE ,THE PIN GOLD PLATED, THE SHELL FOR GOLD PLATING,BLACK INSULATOR	1	PCS
②	CONNECTOR	HDMI 19PIN FEMALE WITH PCB BOARD,THE PIN GOLD PLATED, THE SHELL FOR GOLD PLATING,BLACK INSULATOR	1	PCS
①	CABLE	(1P*7/0.127TC+D7/0.127TC+AL+MY)*5C+(4C*7/0.127TC +D7/0.127TC+AL)*1C, BLACK PVC JACKET, OD;3.2*14.5±0.2MM	0.3	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ACHY	Checked by HELEN	Approved by - date APRIL 23.2013	File name HDMI 1.4 M/F L=0.3M	Date APRIL 23.2013	Scale FREE
<b>LYNDAHL</b>			LKPK045-03		
			LKPK045-03	Edition 1	Sheet 1/1